




STOW SHELF[®]

The high quality storage system for goods of low to medium weights.

STOWSHELF® SHELVING SYSTEM

The Stowshelf® shelving system can be applied in any environment, from offices to industrial warehousing. It is designed for light to medium heavy loads of up to 230 kg / shelf by virtue of its built-in box beam design. Multitier installations are also available as the frame can take loads of up to 4000 kg. The Stowshelf® shelving system can be applied in any environment, from offices to industrial warehousing. bla blabla blabla blabla bla galvanized.

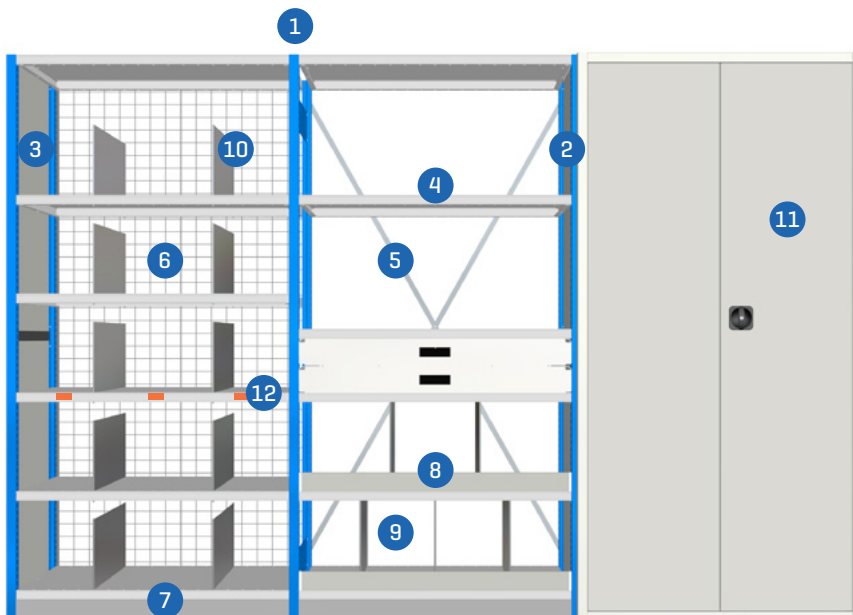

- 1/ The upright
- 2/ The closed frame
- 3/ The end frame
- 4/ The shelf
- 5/ The back bracing
- 6/ The back mesh
- 7/ The plinth
- 8/ The bin front
- 9/ The full height divider
- 10/ The half height divider
- 11/ The door with lock
- 12/ The labelling

DIMENSIONS & CAPACITY

Lengths: 965 & 1265

Depths: 300/400/500/600

Load capacity: from 100 kg to 230 kg

[CLEAR BENEFITS FOR EVERY APPLICATION]

> Complies with the European FEM and EN regulations; quality assured to ISO 9001
> All components have been thoroughly tested in specialized laboratories

> Computer aided design ensuring the best solution for every application, including static calculation
> Fully automated production to a high quality standard and in a cost effective way



STOWSHELF® FRAME & UPRIGHTS

The frame comprises two Stowshelf® uprights and a frame bracing system. The rectangular side holes in the uprights allow mounting of the shelf clips at a pitch of 25mm. The round holes are for bolting or riveting of the various kinds of bracing systems.

THE SHELVES: A UNIQUE DESIGN

- The length of the shelf corresponds with most types of cartons and plastic containers
- The box-shaped edge will not twist under load
- The front profile is ideal for fixing labels
- The short side of the shelf is triple folded
- The double folded corners, which are clinched, give a high rigidity and high resistance against impact loads
- The edges are not sharp, avoiding injuries
- The shelves are perforated every 53mm, allowing shelf dividers to be mounted

THE SHELF CLIP

The shelves are supported in each corner on the Stowshelf®-clips. They are adjustable in height every 25mm. The rounded edges of the clips prevent injuries when picking goods.



VARIOUS ACCESSORIES

Basic accessories are amongst others foot-plates, leveling plates and double rack connectors. Options are end caps, bin fronts, full and half height dividers, steel drawers with dividers, back and side panels, double door sections with lock, ...



OTHER STOW PRODUCTS

Pal Rack



Drive in



Stow Mobile



Stow Atlas



Midi Rack



Mezza Stow



Stow International nv • www.stow-group.com

Stow Belgium • www.stow.be | Stow Nederland • www.stow.nl | Stow France • www.stow.fr

Stow Deutschland • www.stow.de | Stow ČR • www.stow.cz | Stow U.K. • www.stow.co.uk

Stow Poland • www.stowpolska.pl | Stow Austria • www.stow.at | Stow China • www.stow.com.cn